




黃銅 締込管継手

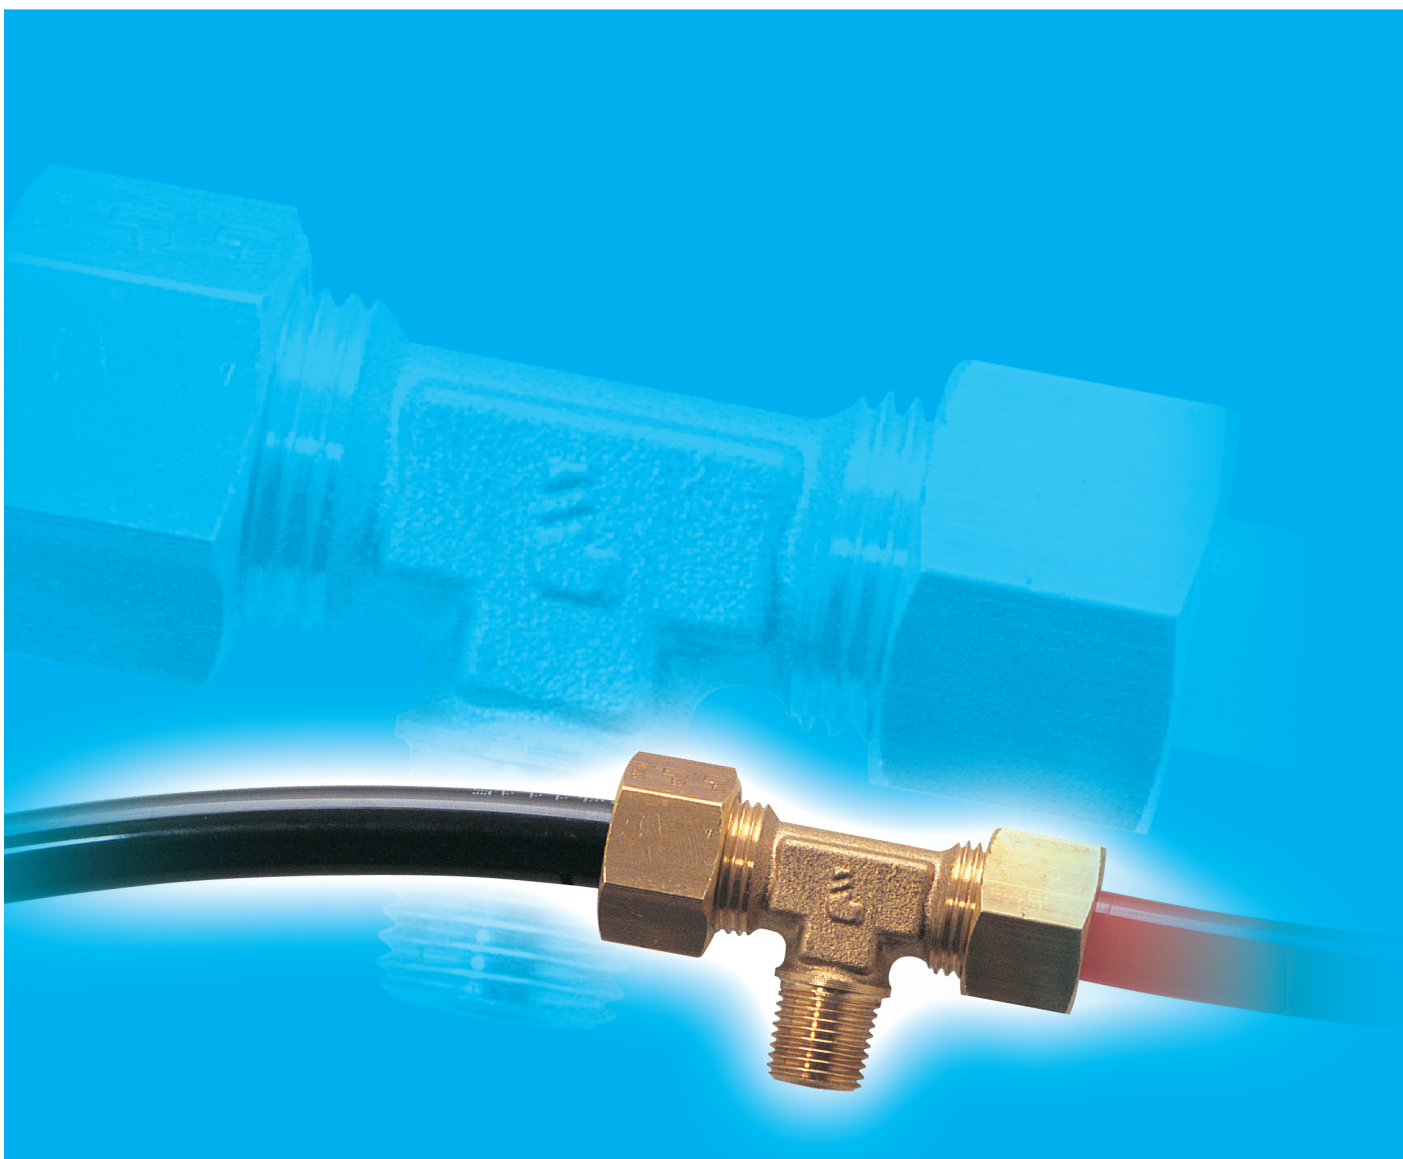

0105 コネクタ R(PT)ねじ

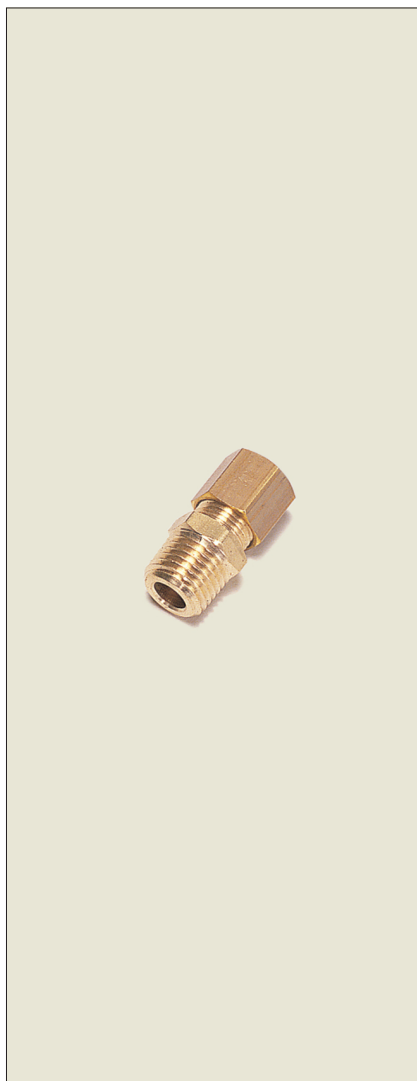


黄銅




ØD	C		F	F1	H 最大	H1	kg
4	R1/8	0105 04 10	10	10	17	7	0,013
5	R1/8	0105 05 10	11	12	17,5	7,5	0,017
5	R1/4	0105 05 13	14	12	17,5	7,5	0,022
6	R1/8	0105 06 10	11	13	18	7,5	0,017
6	R1/4	0105 06 13	14	13	18	7,5	0,024
6	R3/8	0105 06 17	17	13	19	8,5	0,031
8	R1/8	0105 08 10	13	14	19,5	7	0,021
8	R1/4	0105 08 13	14	14	19,5	7	0,026
8	R3/8	0105 08 17	17	14	20,5	8	0,032
10	R1/8	0105 10 10	17	19	24	9	0,043
10	R1/4	0105 10 13	17	19	24	9	0,047
10	R3/8	0105 10 17	17	19	24	9	0,048
10	R1/2	0105 10 21	22	19	25	10	0,067
12	R1/4	0105 12 13	19	22	24	9	0,059
12	R3/8	0105 12 17	19	22	24	9	0,061
12	R1/2	0105 12 21	22	22	25	10	0,076
14	R1/4	0105 14 13	22	24	25	8	0,067
14	R3/8	0105 14 17	22	24	25	8	0,069
14	R1/2	0105 14 21	22	24	26	9	0,079
14	R3/4	0105 14 27	27	24	27	10	0,105
15	R3/8	0105 15 17	22	24	25	8	0,064
15	R1/2	0105 15 21	22	24	26	9	0,075
16	R1/4	0105 16 13	24	27	27	9,5	0,091
16	R3/8	0105 16 17	24	27	27	9,5	0,092
16	R1/2	0105 16 21	24	27	27	9,5	0,100
16	R3/4	0105 16 27	27	27	28	10,5	0,120
18	R1/2	0105 18 21	27	30	30	10,5	0,130
18	R3/4	0105 18 27	27	30	30	10,5	0,140
20	R1/2	0105 20 21	30	32	32	11	0,148
20	R3/4	0105 20 27	30	32	32	11	0,156
22	R1/2	0105 22 21	32	36	33	11	0,180
22	R3/4	0105 22 27	32	36	33	11	0,193
22	R1"	0105 22 34	36	36	33	11	0,226
25	R3/4	0105 25 27	36	41	36	11	0,263
25	R1"	0105 25 34	36	41	36	11	0,277
28	R3/4	0105 28 27	41	42	36	11	0,272
28	R1"	0105 28 34	41	42	36	11	0,287

0105 コネクタ NPTねじ

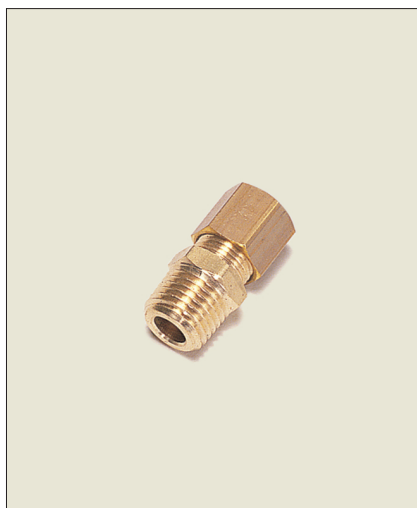

黄銅




ØD	C		F	F1	H 最大	H1	kg
6	1/8	0105 06 11	11	13	18	7,5	0,018
6	1/4	0105 06 14	14	13	18	7,5	0,028
8	1/8	0105 08 11	13	14	21	7	0,021
8	1/4	0105 08 14	14	14	18,5	7	0,026
10	1/4	0105 10 14	17	19	24	9	0,047
10	3/8	0105 10 18	17	19	24	9	0,048
10	1/2	0105 10 22	22	19	25	10	0,067

0109 エルボ R (PT) ねじ



黄銅




ØD	C		F	H1	J	L 最大	L1	kg
4	R1/8	0109 04 10	10	17	8	19	9,5	0,017
4	R1/4	0109 04 13	10	20	10	19	11	0,024
5	R1/8	0109 05 10	12	17,5	8	21	11	0,019
5	R1/4	0109 05 13	12	21,5	10	22	12	0,029
6	R1/8	0109 06 10	13	18	8	22	11	0,021
6	R1/4	0109 06 13	13	21,5	10	22	12	0,030
8	R1/8	0109 08 10	14	18,5	10	28	15	0,028
8	R1/4	0109 08 13	14	22	10	28	15	0,033
8	R3/8	0109 08 17	14	24	12	28	15	0,044
10	R1/4	0109 10 13	19	25	12	30	14,5	0,052
10	R3/8	0109 10 17	19	25,5	12	30	14,5	0,061
10	R1/2	0109 10 21	19	32	19	36	21	0,105
12	R1/4	0109 12 13	22	26	15	30	15	0,074
12	R3/8	0109 12 17	22	27	15	30	15	0,077
12	R1/2	0109 12 21	22	32	19	36	21	0,117
14	R3/8	0109 14 17	24	30	19	35	18	0,103
14	R1/2	0109 14 21	24	32	19	35	18	0,107
15	R3/8	0109 15 17	24	30	19	35	18	0,104
15	R1/2	0109 15 21	24	32	19	35	18	0,104
16	R3/8	0109 16 17	27	30	19	39	21	0,118
16	R1/2	0109 16 21	27	33,5	19	39	21	0,134
16	R3/4	0109 16 27	27	36,5	23	41	23	0,186
18	R1/2	0109 18 21	30	35,5	23	41	21,5	0,175
18	R3/4	0109 18 27	30	36,5	23	41	21,5	0,201
20	R1/2	0109 20 21	32	36,5	23	42	21,5	0,174
20	R3/4	0109 20 27	32	38	23	42	21,5	0,274
22	R3/4	0109 22 27	36	40	27	50	30	0,294
22	R1"	0109 22 34	36	44	27	50	30	0,322
25	R3/4	0109 25 27	41	43	27	54	30	0,330
25	R1"	0109 25 34	41	44	27	54	30	0,360
28	R3/4	0109 28 27	42	46	32	54	30	0,364
28	R1"	0109 28 34	42	48	32	54	30	0,380

0109 エルボ NPTねじ




黄銅




ØD	C		F	H1	J	L 最大	L1	kg
6	1/8	0109 06 11	13	18	8	22	11	0,021
6	1/4	0109 06 14	13	21,5	10	22	12	0,030
8	1/8	0109 08 11	14	18,5	10	28	15	0,028
8	1/4	0109 08 14	14	22	10	28	15	0,033
10	1/4	0109 10 14	19	25	12	30	14,5	0,052

0122 バープコネクタ (ホース用)

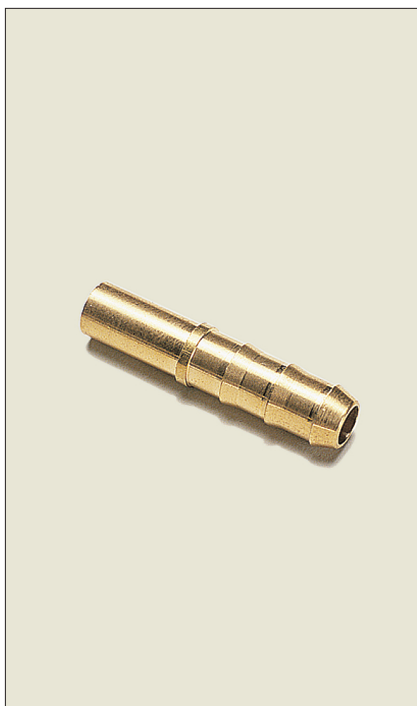


黄銅



Ø D1	Ø D2		Ø D3	L	L1	ØT 最小	kg
4	4	0122 04 04	6	37,5	22,5	3	0,004
5	4	0122 05 04	6	37,5	22,5	3	0,004
6	4	0122 06 04	6	37,5	22,5	3	0,005
6	7	0122 06 07	9	37,5	22,5	6	0,007
8	6	0122 08 06	8	40	22,5	5	0,007
8	7	0122 08 07	9	40	22,5	6	0,008
8	10	0122 08 10	12,5	40	22,5	9	0,012
10	7	0122 10 07	9	43	22,5	6	0,010
10	10	0122 10 10	12,5	43	22,5	9	0,013
12	10	0122 12 10	12,5	43	22,5	9	0,013
12	13	0122 12 13	15	50	29,5	12	0,018
14	13	0122 14 13	15	52	29,5	12	0,018
14	16	0122 14 16	18,5	60,5	38	15	0,031
15	13	0122 15 13	15	52	29,5	12	0,020
15	16	0122 15 16	18,5	60,5	38	15	0,032
16	13	0122 16 13	15	53,5	29,5	12	0,021
16	16	0122 16 16	18,5	62	38	15	0,029
18	16	0122 18 16	18,5	62	38	15	0,032
18	19	0122 18 19	21,5	62	38	18	0,039
20	16	0122 20 16	18,5	64	38	15	0,036
20	19	0122 20 19	21,5	64	38	18	0,039
22	19	0122 22 19	21,5	64	38	18	0,040
25	19	0122 25 19	21,5	70	38	18	0,050
25	25	0122 25 25	27,5	70	38	24	0,063
28	25	0122 28 25	27,5	70	38	24	0,088

0138 ガasket (材質: 銅)




C		G1	G2	K	kg
6	0138 06 00	6,3	9	1	0,001
8	0138 08 00	8,3	11	1	0,001
10 G1/8	0138 10 00	10,3	13,5	1	0,001
12	0138 12 00	12,3	15,5	1,3	0,001
13 G1/4	0138 13 00	13,5	18	1,3	0,001
14	0138 14 00	14,3	18	1,5	0,001
16	0138 16 00	16,3	20	1,5	0,001
17 G3/8	0138 17 00	17,3	21	1,5	0,001
18	0138 18 00	18,3	22	1,5	0,001
20	0138 20 00	20,3	24	1,5	0,001
21 G1/2	0138 21 00	21,3	26	1,5	0,002
22	0138 22 00	22,3	27	1,5	0,002
24	0138 24 00	24,3	29	2	0,003
26	0138 26 00	26,3	31	2	0,003
27 G3/4	0138 27 00	27,3	32	2	0,005
30	0138 30 00	30,3	36	2	0,004
33 G1"	0138 33 00	33,5	39	2	0,006
36	0138 36 00	36,3	42	2	0,006
39	0138 39 00	39,3	44	2	0,006
42 G1 1/4	0138 42 00	42,5	49	2	0,007
45	0138 45 00	45,3	52	2	0,008
48 G1 1/2	0138 48 00	48,3	55	2	0,008
52	0138 52 00	52,3	60	2	0,011
60 G2"	0138 60 00	60	68	2,5	0,014

0127 スリーブ (黄銅)



黄銅



ØD1	ØD2		kg
4	2	0127 04 00	0,001
4	2,7	0127 04 27	0,001
5	3	0127 05 03	0,001
5	3,3	0127 05 00	0,001
6	4	0127 06 00	0,001
8	5,5	0127 08 55	0,001
8	6	0127 08 00	0,001
10	7	0127 10 07	0,002
10	7,5	0127 10 75	0,002
10	8	0127 10 00	0,002
12	8	0127 12 08	0,002
12	9	0127 12 09	0,002
12	10	0127 12 00	0,002
14	11	0127 14 11	0,003
14	12	0127 14 00	0,003
15	12	0127 15 12	0,003
16	13	0127 16 13	0,003
18	14	0127 18 14	0,004
20	15	0127 20 15	0,004
22	16	0127 22 16	0,005
25	19	0127 25 19	0,005